

U.S. DEPARTMENT OF COMMERCE PATENT & TRADEMARK OFFICE

| | | | |
|--|---|--|--|
| B/O Form PTO-1390 | | Transmittal Letter to the United States Designated/Elected Office (DO/EO/US) Concerning a Filing Under 35 USC 371 | Attorney's Docket Number ENGQ3001/JEK |
| | | | U.S. Application Number (if known) 09/926790 |
| International Application Number PCT/SE00/01314 | International Filing Date 21 June 2000 | Priority Date Claimed 23 June 1999 | |
| Title of Invention METHOD AND DEVICE FOR LOG MEASUREMENT | | | |
| Applicant(s) for DO/EO/US Anders ENGQVIST et al. | | Assignee | |

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items under 35 USC 371:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 USC 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 USC 371.
3. ☒ This express request to begin national examination procedures (35 USC 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 USC 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed 35 USC 371(c)(2).
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 USC 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 USC 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☒ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 USC 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 USC 371(c)(4)). (☐ Executed ☒ Unexecuted)
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 USC 371(c)(5)).

Items 11 to 16 below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: 5 sheets formal drawings

| | | | | | |
|--|--------------|---|------------|---|-----------------|
| Application Number (if Known) 09/926790 | | International Application Number PCT/SE00/01314 | | Attorney's Docket Number ENGQ3001/JEK | |
| | | | | Calculations | PTO USE ONLY |
| 17. The following fees are submitted: Basic National Fee (37 CFR 1.492(a)(1)-(5)): <input type="checkbox"/> Search report has been prepared by the EPO or JPO \$890.00 <input type="checkbox"/> International Preliminary Examination Fee paid to USPTO (37 CFR 1.482) \$710.00 <input type="checkbox"/> No International Preliminary Examination Fee paid to USPTO (37 CFR 1.482) but International Search Fee paid to USPTO (37 CFR 1.445(a)(2)) \$740.00 <input checked="" type="checkbox"/> Neither International Preliminary Examination Fee (37 CFR 1.482) nor International Search Fee (37 CFR 1.445(a)(2)) paid to USPTO \$1040.00 <input type="checkbox"/> International Preliminary Examination Fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 | | | | | |
| ENTER APPROPRIATE BASIC FEE AMOUNT | | | | \$ 1,040.00 | |
| Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)). | | | | | |
| CLAIMS | NUMBER FILED | NUMBER EXTRA | RATE | | |
| Total Claims | 18 -20 = | | × \$18.00 | | |
| Independent Claims | 2 -3 = | | × \$84.00 | | |
| Multiple Dependent Claims (if applicable) | | | + \$280.00 | \$ 280.00 | |
| TOTAL OF ABOVE CALCULATIONS | | | | \$ 1,320.00 | |
| Reduction by ½ for filing by small entity, if applicable. Small Entity Status is asserted pursuant to 37 CFR 1.27 for this application. | | | | \$ 660.00 | |
| SUBTOTAL | | | | \$ 660.00 | |
| Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)). | | | | | |
| TOTAL NATIONAL FEE | | | | \$ 660.00 | |
| Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property. | | | | | |
| TOTAL FEES ENCLOSED | | | | \$ 660.00 | |
| | | | | Amount to be: _____ | Refunded: _____ |
| | | | | | Charged: _____ |

- a. ☒ A check in the amount of **\$660.00** to cover the fees is enclosed.
- b. ☐ Please charge my **Deposit Account Number 02-0200** in the amount of \$ _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to **Deposit Account Number 02-0200**. A duplicate copy of this sheet is enclosed.

Note: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.




Customer 23364

BACON & THOMAS, PLLC
 625 SLATERS LANE - FOURTH FLOOR
 ALEXANDRIA, VIRGINIA 223124-1176
 (703) 683-0500

DATE: 20 December 2001

Respectfully submitted,

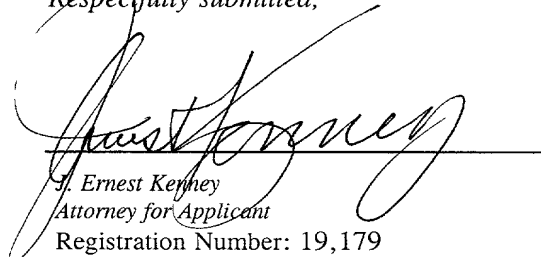
 J. Ernest Kenney
 Attorney for Applicant
 Registration Number: 19,179

09/926790

531 Rec'd PCT

20 DEC 2001
PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

International Patent Application
No. PCT/SE00/01314

PCT/DO/EO/US

International Filing Date: 21 June 2000

Attorney Docket: ENGQ3001/JEK

Applicant: Anders ENGQVIST et al.

For: METHOD AND DEVICE FOR LOG MEASUREMENT

PRELIMINARY AMENDMENT

Commissioner for Patents
Washington, D.C. 20231

Sir:

This paper accompanies documents submitted to establish the U.S. national stage of the above-identified international patent application.

Before calculation of the filing fee and before examination, kindly amend the claims as follows:

IN THE CLAIMS:

Please amend the claims as originally filed as shown on the appended APPENDIX OF CLAIMS, which includes amended and non-amended claims. Also appended hereto an APPENDIX OF MARKED UP CLAIMS showing the changes which have been made.


REMARKS

All rights are reserved to the original claimed subject matter. The claims have been amended to reduce the filing fees and to restate the inventive subject matter in clear terms. None of the amendments are intended to narrow any element of the

International Application No. PCT/SE00/01314

claims as they stood prior to amendment. Examination of the application as amended is respectfully requested.

Respectfully submitted,
BACON & THOMAS, PLLC

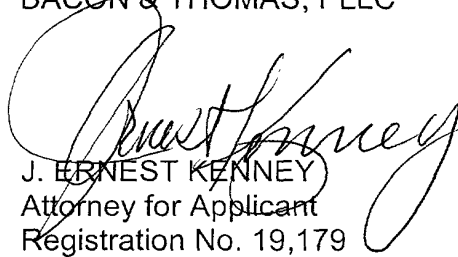
J. ERNEST KENNEY
Attorney for Applicant
Registration No. 19,179



Customer 23364

BACON & THOMAS, PLLC
625 Slaters Lane - 4th Floor
Alexandria, VA 22314-1176
Telephone: (703) 683-0500
Facsimile: (703) 683-1080

Date: December 20, 2001

S:\Producer\jek\ENGQVIST - ENGQ3001\preliminary amendment.wpd



23364

PATENT TRADEMARK OFFICE

International Application No. PCT/SE00/01314
Attorney Docket: ENGQ3001/JEK

APPENDIX OF CLAIMS

1. Method for detecting the wood surface profile of a log, characterized in that one optical image analysis system and at least one further measuring system is used to determine the wood surface profile.

2. Method according to claim 1, characterized in that said optical image analysis system creates an image of a log end, which image is created by a non-transradiating technique.

3. Method according to claim 1 or 2, characterized in that a log end image, obtained by said optical image analysis, is combined with positions for individual points in the log, whose positions have been obtained with another, under bark measuring system in order to determine the wood surface profile.

4. Method according to claim 1 or 2, characterized in that a log end image, obtained by said optical image analysis, is combined with positions for individual points on the log, whose positions have been obtained with another, on bark measuring system in order to determine the wood surface profile.

5(Amended). Method according to claim 1 or 2, characterized in that a log end image, obtained by said optical image analysis, is combined with another log end image obtained with some other measuring method.

6(Amended). Method according to claim 1 or 2, characterized in that a log end profile, obtained by said optical image analysis, is replaced or combined with another log end profile, obtained with some other measuring method, in those areas of the wood surface profile where the wood surface profile obtained by the image analysis is less accurately determined than the wood surface profile obtained with some other measuring method for the same area.

7(Amended). Method according to claim 1 or 2, characterized in that measurement results, obtained by some other measuring method, are used integrated in the image analysis to determine the wood surface profile.

8. Device for detecting the wood surface profile of a log, characterized in that said device comprises at least one optical image analysis system and at least one further measuring system, which systems are used to determine the wood surface profile.

9. Device according to claim 8, characterized in that said optical image analysis system comprises a non-transradiating measuring system, which creates an image of a log end.

10. Device according to claim 8 or 9, characterized in that said another measuring system is an under bark measuring system, which determines positions for individual points in the log.

11. Device according to claim 8 or 9, characterized in that said another measuring system is an on bark measuring system, which determines positions for individual points on the log.



23364

PATENT TRADEMARK OFFICE

09/926790

531 Rec'd PC

20 DEC 2001

International Application No. PCT/SE00/01314
Attorney Docket: ENGQ3001/JEK

APPENDIX OF MARKED UP VERSION OF CLAIMS

5(Amended). Method according to [anyone of the claims 1 to 4] claim 1 or 2, characterized in that a log end image, obtained by said optical image analysis, is combined with another log end image obtained with some other measuring method.

6(Amended). Method according to [anyone of the claims 1 to 5] claim 1 or 2, characterized in that a log end profile, obtained by said optical image analysis, is replaced or combined with another log end profile, obtained with some other measuring method, in those areas of the wood surface profile where the wood surface profile obtained by the image analysis is less accurately determined than the wood surface profile obtained with some other measuring method for the same area.

7(Amended). Method according to [anyone of the claims 1 to 6] claim 1 or 2, characterized in that measurement results, obtained by some other measuring method, are used integrated in the image analysis to determine the wood surface profile.

Field of the invention

5 The present invention refers to a method for automatic detection of the wood surface of a log. The method is mainly intended to be used in a sorting plant for saw timber with the purpose of measuring dimensions and properties of individual logs in order to make a better classification of the individual logs with respect to selected properties, such as shape and dimension, and thereby maximize the sawyield.

10

State of the art

Today both older measuring equipment, which generally relies on shadow registration, and more modern measuring equipment based on laser techniques (see e.g. SE 508718) are used for sorting and measuring logs. A common trait for this measuring systems is that they measure the dimensions of the log on top of the bark, despite the fact that one, from a sawyield point of view, in practice only is interested in the log characteristics, such as dimensions and profile, under the bark. In the last years, the development of equipment for log measurements has therefore also been directed to transradiating techniques, such as X-ray techniques (see e.g. US 5394342 and US 5023805). However, the X-ray technique is inherently very expensive and has not come into practical use.

At present, there are no systems for sorting and measuring separate logs based on image analysis. Since image analysis often is based on operations that detect edges and lines in the picture, it is required that the analyzed object is clean enough for the searched edges and lines to be identifiable. In a sorting plant this prerequisite is often not satisfied, since the end surfaces of the logs often are contaminated with, for example, dirt, snow or colour marks.

Background of the invention

Existing measuring systems for sorting logs based on their dimensions rely on shadow measurement in one or two directions by a measuring frame, or laser technique. Both types of system measure the outer dimensions of the log with the bark included. For the sorting, the system has then to be provided with information regarding the bark thickness of the log. The bark thickness is estimated by means of a value based on experience and existing data about bark thickness for different sorts of woods. In a sorting plant, one person visually

classifies all logs into a number of quality classes, and this person makes a classification of the bark thickness into three different classes. Consequently, for an individual log, the maximum sawyield is not obtained, since the bark thickness varies for individual logs.

5 The person who makes the classification has an increasing number of qualities to grade, and there is always a demand from the sawmills to increase the log throughput. A higher degree of automatization in the classification stations is therefore desirable because of the subjectivity in the classification, the arduous working condition for the person conducting the classification and the
10 demand for higher rate of log throughput etc.

Image analysis is a technique often used to localize objects in a picture, for instance by means of boundary or edge detection. The present invention utilizes image analysis to detect points on the borderline between the wood and the bark in order to detect the log end profile under the bark, i.e. the wood surface profile.
15 However, a log end may be so contaminated that it is impossible to use image analysis to find a continuous borderline between the wood and the bark around the whole end of the log. The contamination can, for instance, consist of pitch, dirt, blue stains, snow, ice, colour marks etc. The image analyses can also mix-up the boundary between the wood and the bark with other types of lines or edges,
20 such as prominent growth rings.

The shape of the log end varies for individual logs. It is therefore not possible to directly apply industrial applications of image analysis, in which shape and size of the objects are known. It is also not realistic either to position the log ends with same degree of accuracy or to prevent contamination in the
25 same extent as in controlled industrial environments in order to facilitate the image analysis.

The present invention solves the problems above by means of a combination of image analysis for detecting points on the wood surface profile and another system for measuring in points on a log end, preferably by measuring in points on
30 top of the bark by, for example, a shadow measurement, but also by measurements of points situated on other places, for instance on the wood surface, by X-ray measurements, which combination gives a measuring method with better accuracy than the present systems and with high reliability.

By making the image analysis, whereby the whole wood profile under bark
35 is detected, integrated, synergistic effects are obtained which makes to method well suited for automated classification of logs.

Brief description of the drawings

Figure 1 is a schematic view of the parts included in the method according to the invention, in which a log end A is depicted by a imaging sensor 2 and points on top of the bark of the log end are measured by another sensor (3, 3').
5 The image of the log end and position information for points on the bark of the log end are stored and processed in a computer unit 5.

Figure 2 shows an image of the log end A, where position information about the log end on bark have been transformed to the image plane (B1 and B2) in order to detect a wood surface profile P.

10 Figure 3 shows a method for integrated image analysis in accordance with the invention, in which a measurement of the position for a point B3 on the bark of the log end together with an experience based value T and a measure of the variation DP are used in order to obtain points that, with a certain probability, are lying on the wood surface profile P.

15 Figure 4 shows a method for integrated image analysis in accordance with the invention, in which an elliptical estimation of the wood surface profile together with an experience based value of the bark thickness are fitted into a rectangle Pre obtained by a two way shadow measurement. The method distinguishes parts of the wood surface profile that are not detectable in the
20 image due to bark scrap Qb and contamination Qd.

Figure 5 shows a method for integrated image analysis in accordance with the invention, in which the wood surface is accurately detected for the main part of the wood surface profile Pd, while remaining parts Pe are filled in by means of on bark measurements of the log end, experienced based values of the bark
25 thickness and those portions of the remaining parts Pe that actually can be detected.

Detailed description of the invention

The invention refers to a method for detecting the profile outlining the periphery of the wood surface of a log end by a combination of two measuring
30 systems, where:

- S1 is a method for determining positions for points on the bark of a log end profile in order to estimate the shape of the log end and/or its spatial position, and
- S2 is an image analysis system, which in an image of a log end surface
35 detects image points on the wood surface profile under the bark.

Techniques in accordance with the system S1 for measurements of the log, on top of or under the bark, can, for example, be one or more of the following:

- shadow measurements,
- 3D-measurements with structured light, such as image analysis,
5 together with illumination of the log with a laser slit,
- distance measurement with a sensor measuring the response from signals, such as visible light, infrared light, radar, microwaves or some other type of electromagnetic radiation, or ultrasound or some other type of acoustic signals, and
- 10 - mechanical measurements of the log.

Techniques for creating an image of a log end or a crosscut section of a log in accordance with the image analysis system S2 can, for example, be one or more of the following:

- 15 - an imaging sensor, such as a CCD-camera,
- an imaging sensor which is sensitive for visible light, infrared light, thermal infrared or ultraviolet light, or radiation within another part of the electromagnetic spectrum,
- an imaging sensor which can create a monochromatic image of the log
20 end or an image by means of RGB-separation or hyperspectral imaging techniques, and
- a sensor measuring response from signals sent into the log, such as ultrasound or some other acoustic signals, or radar, microwaves, radio waves, or some other type of electromagnetic radiation.

25 By the term "log end" as used herein is meant a crosscut section including wood and bark (indicated with C in Figure 1). When measuring the dimension of a log, for example the log diameter, in order to estimate the sawyield, one generally measures at, or in close proximity to, that end of the log which is closest to the top of the tree, since this end, in contrast to the root end, will
30 determine the maximum sawyield.

By the term "wood surface" as used herein is meant the part of the log end which consists of wood, i.e. the log end exclusive of the bark.

Referring now to Figure 1, where an image analysis system according to the invention comprises an image-creating sensor 2, such as a video camera, for

creating an image A of a log end. The image A is stored and analyzed in a computer unit 5.

5 The method S1 for determining end surface profiles on bark comprises at least one measuring system for position determination of at least one point on the profile around the end surface 3 on bark.

We now refer to Figure 2. The relation between the two dimensional position in the image and the corresponding spatial position on the log end is given by the camera equation, i.e. through known relations that depend on the optics of the imaging sensor and its position in relation to the log end.

10 By using the camera equation, positions B1, B2, measured by the system S1 on the bark of the log end, can be projected into positions in the image A.

Consequently, the wood surface profile P can on the one hand be determined in the image by determining points on the wood surface profile mainly by detecting the borderline between the wood and the bark, and on the other hand
15 by calculating the probable position for the wood surface profile P by measurements on bark, which measurements are transformed into the image through the camera equation.

A better estimation of the position of the wood surface profile P can be made if experience based values of the bark thickness are added to the on bark
20 measurements obtained by the method S1.

The way of combining S1 and S2 can be executed by integrating the on bark measurements by S1 with the image analysis S2. This is done by, for each point along the wood surface profile P, using the one bark measurement to calculate the probable position for the wood surface profile P, and use this position in the
25 image analysis S2 to detect the border between the wood and the bark.

In those cases, where the image analysis S2 in combination with on bark measurements S1 are not able to detect the edge between the wood and the bark, because of, for example, contamination or bark scrap at the log end, on bark measurements S1 can, together with experience based values of bark thickness,
30 be used to fill in those segments in the wood surface profile around the log end that are missing in order to obtain a complete wood surface profile.

In those cases, where the image analysis S2 in combination with on bark measurements S1 only detect a portion of the total wood surface profile, which portion is not large enough, or determined with too low probability, for the whole
35 wood surface profile to be determined, on bark measurements S1 together with

experience based values of bark thickness can alone be used to estimate the wood surface profile.

This means that the method according to the invention always measures the profile under bark with at least the same accuracy as systems existing today.

5 However, the vast majority of the logs will be measured with higher accuracy.

This reliability is of outermost importance for the development towards a higher degree of automatization in sorting and measuring logs in a sawmill.

A synergetic effect arising from the combination of image analysis S2 and on bark measurements S1 is that the digital analysis can be concentrated into areas
10 in the image which are likely to contain the borderline between wood and bark, i.e. the wood surface profile. This feature drastically reduces the amount of time the computer unit has to spend on the analysis of image points, or makes it possible to use a less powerful processor (and thereby a cheaper one) in the computer unit, and a more thorough image analysis can be done for those image
15 areas which have been identified as possible candidates for the wood surface points.

Taken together, this gives a reliable, flexible system with high resolution for detection and analysis of the dimensions and properties of the under bark lying wood surface of a log end.

20 The method described above can also be used to detect objects at the log end other than the wood surface profile. Such objects can be naturally occurring objects, such as growth rings, heartwood or the log centre, or defects, such as compression wood, pitch pockets or cracks.

Examples of preferred embodiments

25 Referring now to Figure 3, where a point B3, situated on top of the bark at the log end periphery has been measured with the system S1, can be used in the analysis by using its position and direction in an image of the log end. The direction of point situated on an edge is herein defined as the direction toward the interior of the log that is perpendicular to the line outlined by the edge.

30 By adding an experience based value T of the bark thickness to the point B3 in its direction, a new point P' is obtained. This point P' constitutes a point, which is likely to lie on, or in close proximate to, the wood surface profile. By defining an area DP around the point P' based on information regarding the variation of the bark thickness, an area is obtained, into which the analysis preferably should

be concentrated in order to find points lying on the wood surface profile under bark.

By repeating the procedure described above for each point around the log end measured by S1, an integrated procedure is obtained, whereby the total number of points which have to be analyzed by the image analysis system S2 are substantially reduced.

Figure 4 shows a so called shadow measuring device, which is an equipment corresponding to S1 and commonly used for dimension measurements of logs. This device illuminates the log from the side, perpendicularly to the log, in order to estimate its diameter on bark. The device may be used to create a shadow of the log in two directions.

The image of the log may be registered by a video camera mounted at a suitable position along the route of the log in the sawmill, for instance at the classification prior to the sorting.

By means of a two way shadow measuring device it is possible to estimate the size of the log end and, if the conditions so allows, its position by a rectangle Pre in an image of the log end. The probably position in the image for the wood surface profile of the log end, corresponding to P' in Figure 3, can be described as an ellipse Pce which is fitted into the rectangle Pre by means of an experience based value of the bark thickness.

By using the distance from the ellipse Pce to the profile detected by the image analysis system S2, it is possible to find those parts of the profile where the image analysis is unlikely to be able to determine the wood surface profile at the end surface of the log, due to, for instance, bark scrap Qb or contamination Qd on the log end.

We now refer to Figure 5. The result of the analysis is the detected profile Pd of the wood surface under bark. Those parts, which were not detected with enough accuracy by the image analysis, can be estimated by the detected profile Pd and the measurement of the log end profile on bark. By the camera equation, the result is transformed back to the plane of the log end in order to be used in a further analysis of, for example, the shape and dimension of the wood surface.

Although the present invention has been described with reference to specific embodiments, also shown in the appended drawings, it will be apparent for those skilled in the art that many variations and modifications can be done within the scope of the invention as described in the specification and defined in the following claims.

Claims

1. Method for detecting the wood surface profile of a log, characterized in that one optical image analysis system and at least one further measuring system is used to determine the wood surface profile.
- 5 2. Method according to claim 1, characterized in that said optical image analysis system creates an image of a log end, which image is created by a non-transradiating technique.
3. Method according to claim 1 or 2, characterized in that a log end image, obtained by said optical image analysis, is combined with positions for individual
10 points in the log, whose positions have been obtained with another, under bark measuring system in order to determine the wood surface profile.
4. Method according to claim 1 or 2, characterized in that a log end image, obtained by said optical image analysis, is combined with positions for individual points on the log, whose positions have been obtained with another, on bark
15 measuring system in order to determine the wood surface profile.
5. Method according to anyone of the claims 1 to 4, characterized in that a log end image, obtained by said optical image analysis, is combined with another log end image obtained with some other measuring method.
6. Method according to anyone of the claims 1 to 5, characterized in that a
20 log end profile, obtained by said optical image analysis, is replaced or combined with another log end profile, obtained with some other measuring method, in those areas of the wood surface profile where the wood surface profile obtained by the image analysis is less accurately determined than the wood surface profile obtained with some other measuring method for the same area.
- 25 7. Method according to anyone of the claims 1 to 6, characterized in that measurement results, obtained by some other measuring method, are used integrated in the image analysis to determine the wood surface profile.
8. Device for detecting the wood surface profile of a log, characterized in that said device comprises at least one optical image analysis system and at least one

further measuring system, which systems are used to determine the wood surface profile.

9. Device according to claim 8, characterized in that said optical image analysis system comprises a non-transradiating measuring system, which creates
5 an image of a log end.

10. Device according to claim 8 or 9, characterized in that said another measuring system is an under bark measuring system, which determines positions for individual points in the log.

11. Device according to claim 8 or 9, characterized in that said another
10 measuring system is an on bark measuring system, which determines positions
for individual points on the log.

1/5

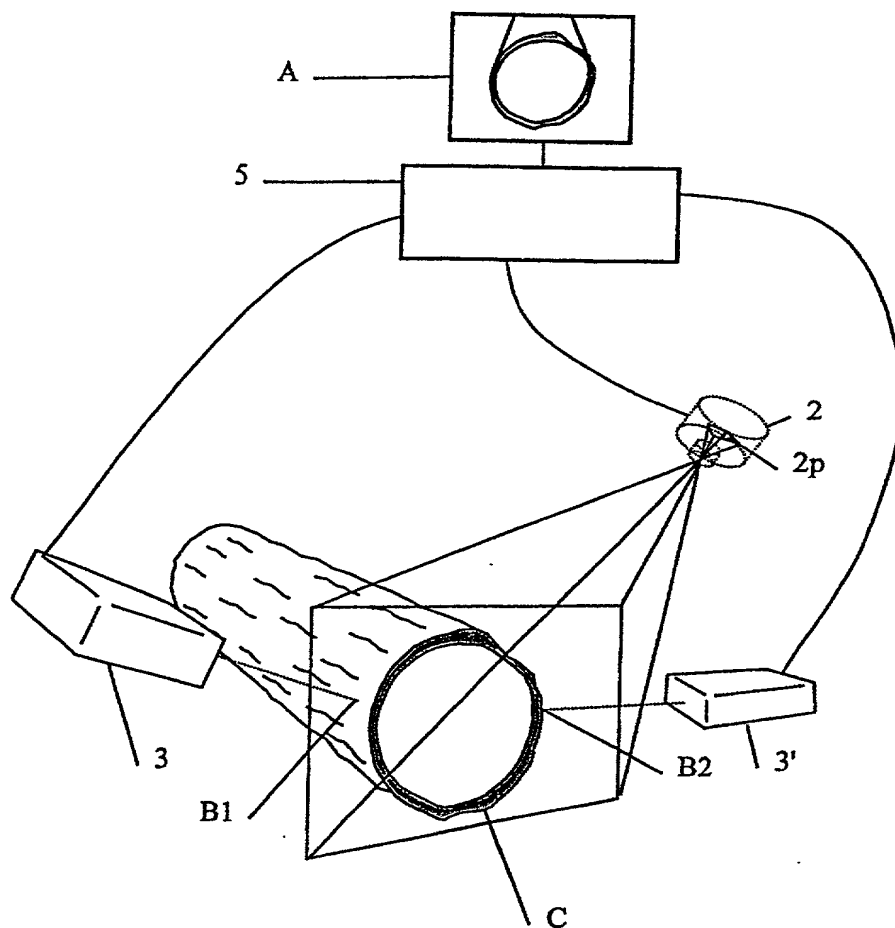


FIG. 1

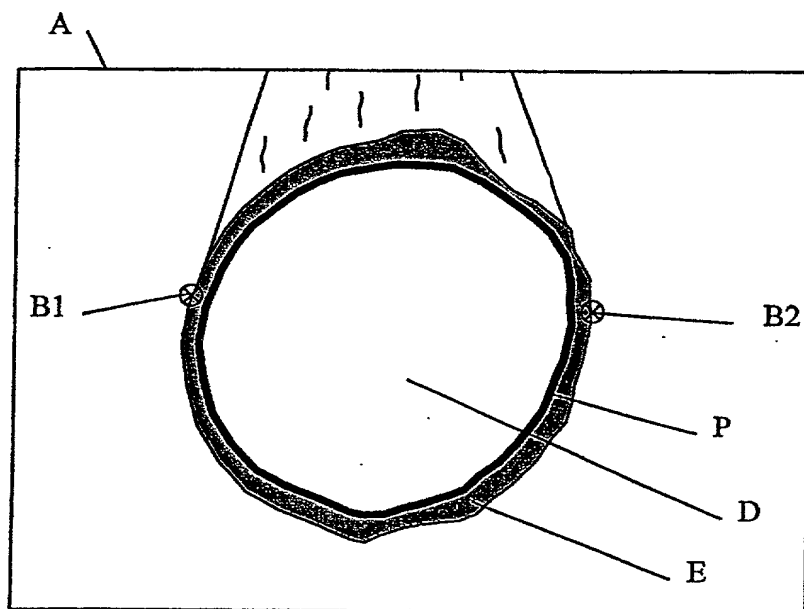


FIG. 2

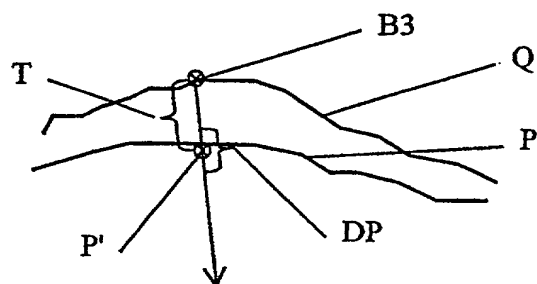


FIG. 3

4/5

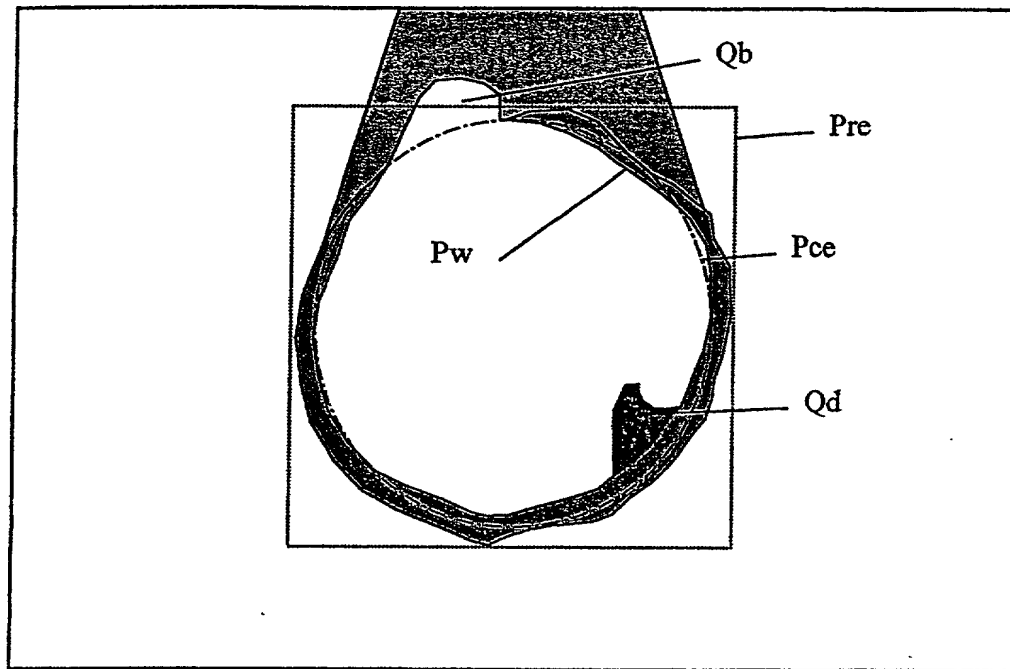


FIG. 4

5/5

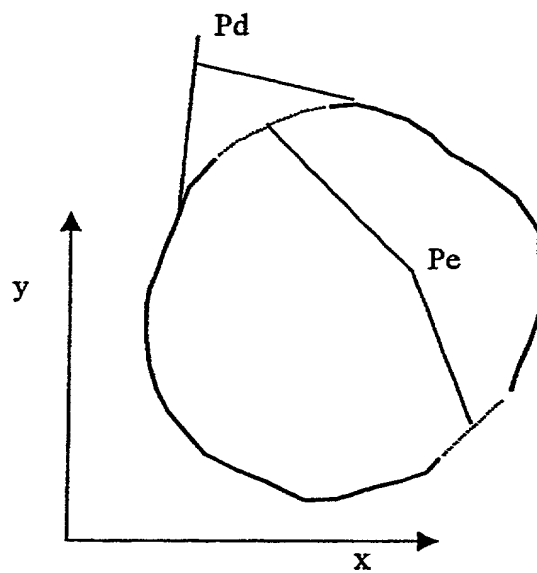


FIG. 5

DECLARATION FOR PATENT APPLICATION AND APPOINTMENT OF ATTORNEY

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name; I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention (Design, if applicable) entitled:

METHOD AND DEVICE FOR LOG MEASUREMENT

the specification of which (check one):

☐ is attached hereto, or ☒ was filed on: **21 June 2001**

as U.S. Application Number or PCT International

Application Number: **PCT/SE00/01314**

and (if applicable) was amended on: **21 June 2000**

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in *Title 37, Code of Federal Regulations, §1.56*. I hereby claim foreign priority benefits under *Title 35, United States Code §119* of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

| PRIOR FOREIGN APPLICATION(S) | | | PRIORITY CLAIMED | |
|------------------------------|---------|----------------------|------------------|----|
| Number | Country | Day/Month/Year Filed | Yes | No |
| 9902422-6 | Sweden | 23 June 1999 | X | |
| | | | | |

☐ Additional Priority Application(s) Listed on Following Page(s)

I HEREBY CLAIM THE BENEFIT UNDER TITLE 35 U.S. CODE §119(E) OF ANY U.S. PROVISIONAL APPLICATIONS LISTED BELOW.

| Application Number | Day/Month/Year Filed |
|--------------------|----------------------|
| | |
| | |

☐ Additional Provisional Application(s) Listed on Following Page(s)

I hereby claim the benefit under *Title 35, United States Code, §120* of any United States application(s) or PCT international application(s) designating The United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of *Title 35, United States Code, §112*, I acknowledge the duty to disclose information which is material to patentability as defined in *Title 37, Code of Federal Regulations, §1.56* which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

| Application Number | Filing Date | Status - Patented, Pending or Abandoned |
|--------------------|-------------|---|
| | | |
| | | |

☐ Additional US/PCT Priority Application(s) listed on Following Page(s)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under *section 1001 of title 18 of the United States Code* and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: I (We) hereby appoint as my (our) attorneys, with full powers of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: J. Ernest Kenney, Reg. No. 19,179; Eugene Mar, Reg. No. 25,893; Richard E. Fichter, Reg. No. 26,382; Thomas J. Moore, Reg. No. 28,974; Joseph DeBenedictis, Reg. No. 28,502; Benjamin E. Urcia, Reg. No. 33,805; and

I(we) authorize my(our) attorneys to accept and follow instructions from Uppsala Patentbyrå Ab regarding any matter related to the preparation, examination, grant and maintenance of this application, any continuation, continuation-in-part or divisional based thereon, and any patent resulting therefrom, until I(we) or my(our) assigns withdraw this authorization in writing.

Send correspondence to:



Customer 23364

BACON & THOMAS, PLLC

625 Slaters Lane - 4th Floor
Alexandria, VA 22314-1176

Telephone Calls to: **J. Ernest Kenney**
(703) 683-0500

| | | |
|---|---------------------------------|---|
| FULL NAME OF FIRST OR SOLE INVENTOR Anders ENGQVIST | | CITIZENSHIP Sweden |
| RESIDENCE ADDRESS Vaktargatan 42B, S-754 22-Uppsala, Sweden Fänkalsg. 9 nb, 75447 | | POST OFFICE ADDRESS IS THE SAME AS RESIDENCE ADDRESS UNLESS OTHERWISE SHOWN BELOW |
| DATE January 16, 2002 | SIGNATURE <i>[Signature]</i> | |

☒ See following page(s) for additional joint inventors.


CONTINUATION OF DECLARATION FOR PATENT APPLICATION AND APPOINTMENT OF ATTORNEY


Page 2


| PRIOR FOREIGN APPLICATION(S) (35 USC §119) | | | PRIORITY CLAIMED | |
|--|---------|----------------------|------------------|----|
| Number | Country | Day/Month/Year Filed | Yes | No |
| | | | | |
| | | | | |


| PRIOR PROVISIONAL APPLICATIONS 35 U.S. CODE §119(E) | |
|---|----------------------|
| Application Number | Day/Month/Year Filed |
| | |
| | |

| PRIOR U.S. OR PCT INTERNATIONAL APPLICATIONS (35 U.S. CODE §120) | | |
|--|-------------|---|
| Application Number | Filing Date | Status - Patented, Pending or Abandoned |
| | | |
| | | |
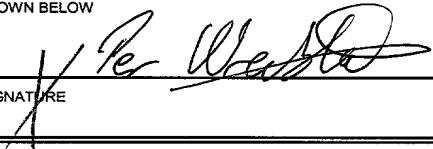
| | | | |
|--|--|--|--|
| FULL NAME OF JOINT INVENTOR Per WRETBLAD | | CITIZENSHIP Sweden | |
| RESIDENCE ADDRESS Börje Rösling, S-755 92 Uppsala, Sweden Kyrkvägen 3, 740 22 Bälinge, Sweden | | POST OFFICE ADDRESS IS THE SAME AS RESIDENCE ADDRESS UNLESS OTHERWISE SHOWN BELOW | |
| DATE January 16, 2002 | | SIGNATURE  | |

| | | | |
|---|--|---|--|
| FULL NAME OF JOINT INVENTOR Sven ANDERSSON | | CITIZENSHIP Sweden | |
| RESIDENCE ADDRESS Fahlströms väg 8, S-741 92 Uppsala, Sweden | | POST OFFICE ADDRESS IS THE SAME AS RESIDENCE ADDRESS UNLESS OTHERWISE SHOWN BELOW | |
| DATE January 16, 2002 | | SIGNATURE  | |

| | | | |
|---|--|---|--|
| FULL NAME OF JOINT INVENTOR Mats NYLINDER | | CITIZENSHIP Sweden | |
| RESIDENCE ADDRESS Dalbovägen 41A, S-756 53 Uppsala, Sweden | | POST OFFICE ADDRESS IS THE SAME AS RESIDENCE ADDRESS UNLESS OTHERWISE SHOWN BELOW | |
| DATE January 16, 2002 | | SIGNATURE  | |

| | | | |
|---|--|---|--|
| FULL NAME OF JOINT INVENTOR Kenneth ALNESS | | CITIZENSHIP Sweden | |
| RESIDENCE ADDRESS Östtuna Täby, S-751 94 Knivsta, Sweden | | POST OFFICE ADDRESS IS THE SAME AS RESIDENCE ADDRESS UNLESS OTHERWISE SHOWN BELOW | |
| DATE January 16, 2002 | | SIGNATURE  | |

☐ See following pages for additional joint inventors/priority applications.